

### CONTENTS

About Skinrock 4-6

The Green Factor 7-8

Creativity 9

Translucent 10

Flexible 11

Weight 12

The Collection 13-30

Project Gallery 31-42

Technical Specification 43



# Welcome to the world of endless possibilities





### The SKINROCK® Product


SKINROCK® a natural stone. Incredibly thin. Incredibly light.


SKINROCK® AG will offer customers an innovative product for the building industry. It is a natural stone designed to stand out as a unique product which opens up new, unlimited opportunities to apply on almost all surfaces.

SKINROCK® is available in over 17 different decors, in natural slate and quartzite, elegant silver tones to green, grey and black shades.

The product is created and developed in Switzerland. We offer a technologically advanced product line with SKINROCK®, SKINROCK®-Plus, SKINROCK®-Static, SKINROCK®-Art and SKINROCK®-Additives. The customers have the option of purchasing all additives from one supplier for exceptional customer services.

By creating a one-of-a-kind product, SKINROCK® AG plans to attract the entire building industry worldwide.

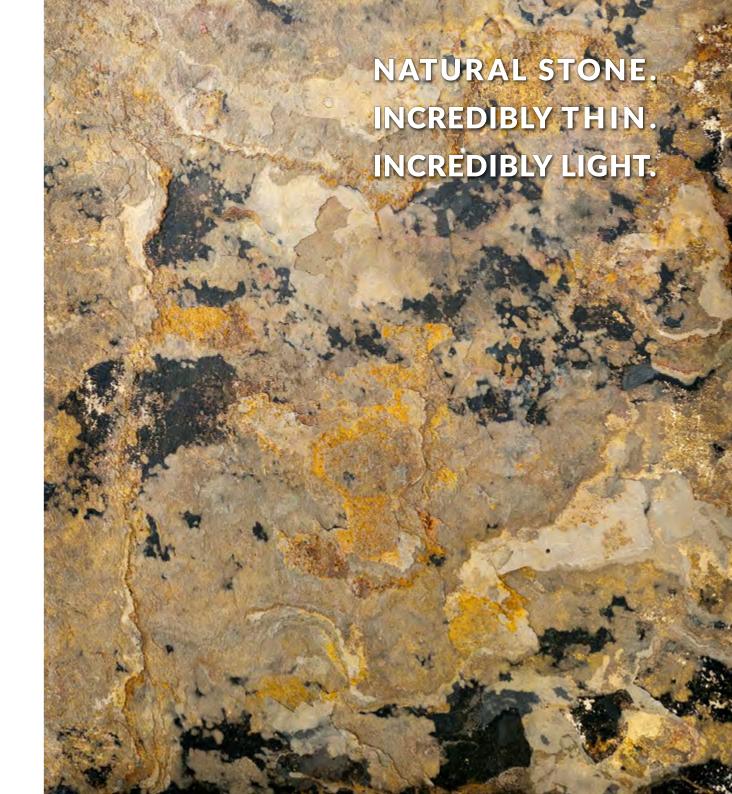

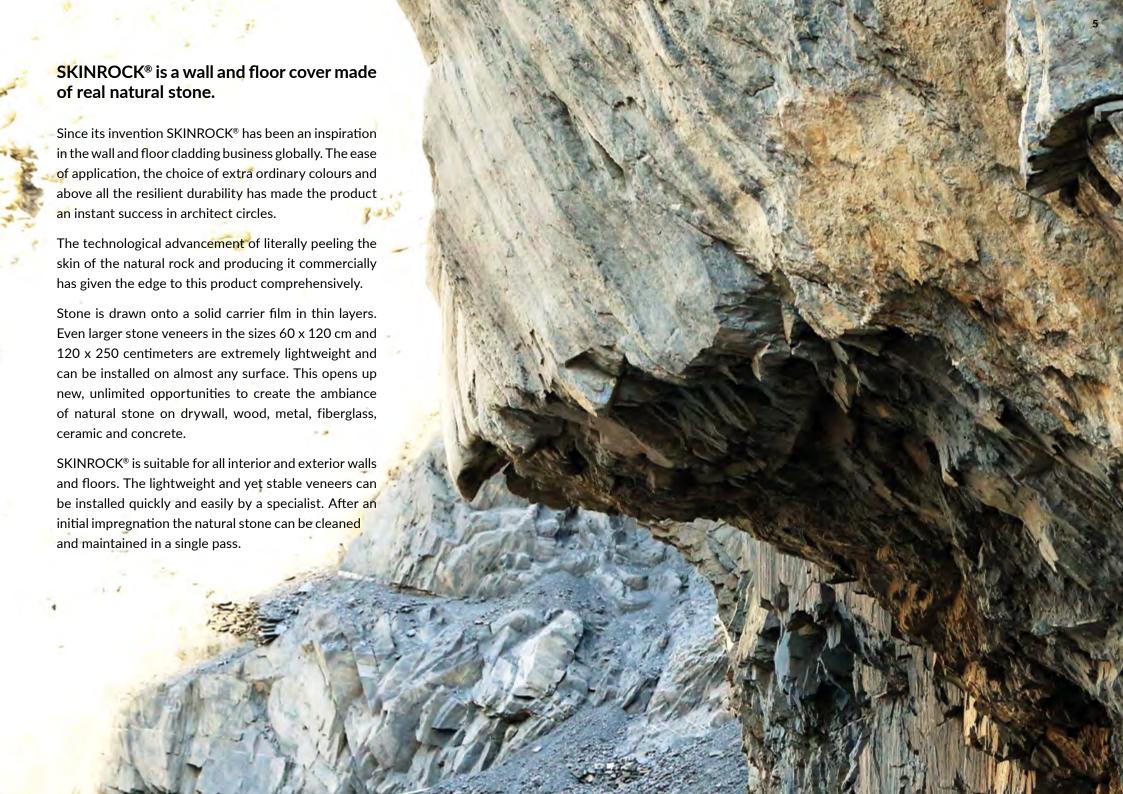



### **PRODUCT LINE**

The company is currently selling five product lines including all necessary additives for a one-stop service.

### SKINROCK®-BASIS

The product is suitable for all internal and external walls.

### **SKINROCK®-BASIS PLUS**

SKINROCK®-Plus is the advanced product line which is ideal for internal flooring.

### SKINROCK®-TRANSLUCENT

Laid with special glue and can be backlit.

### **SKINROCK®-STATIC**

With our new developed facade system SKINROCK®-Static we open up new possibilities for facade constructions.

### SKINROCK®-ART

The flexibility, lightness and possibility to backlit SKINROCK® create new opportunities and range of application.

### SKINROCK®-ADDITIVES

To provide our customers with the most valuable service we have created and developed all necessary additives for the application of SKINROCK® including SKINROCK®-Care, SKINROCK®-Protect, SKINROCK®-Cleaner, SKINROCK®-Cleaner Strong and SKINROCK®-Grout.

## **ECO - GREEN**

Conserves resources, thickness only 1.5 – 3 mm, conventional tiles are typically 10 mm.





# SAVING NATURAL RESOURCES

SKINROCK® is 1.5 mm to maximum 3 mm thick, comparing it with granite and other natural stones which carry a thickness of minimum 10 mm.

Due to this distinct quality of SKINROCK® hundreds of meters can be produced while conserving natural resources.








### **TRANSLUCENT**

The extraordinary feature of SKINROCK® is its translucence ability, offering a versatile range of backlit products to enhance any interior or design project.

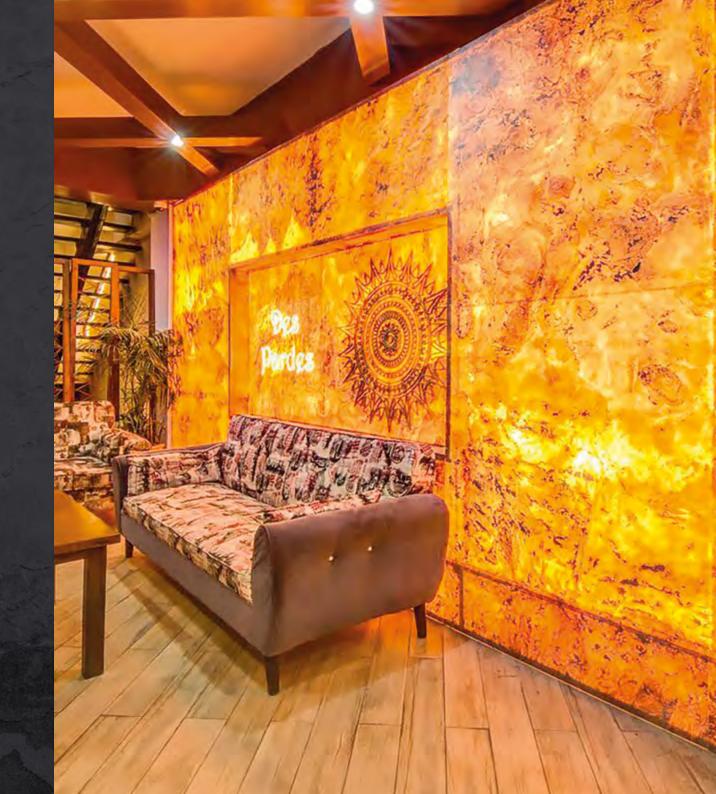



## **LIGHTWEIGHT**

The lightweight of approximately  $2.8\,\mathrm{kg/m^2}$  offers huge static benefits and the ecological sustainability starts with the transportation.





THE SKINROCK COLLECTION

# 5 SKINROCK Created in switzerland

# SHINING HILL

Available sizes:


120 X 250



# SHINING LEAVES

Available sizes:

120 X 250

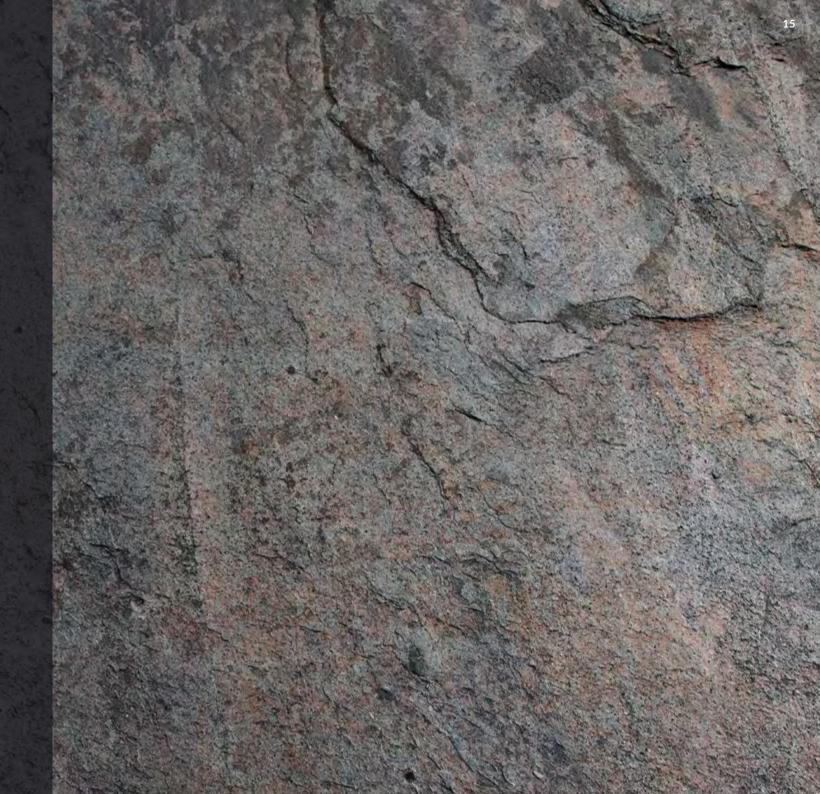

# COPPER NATURAL Available sizes:


120 X 250



# FRESH EARTH

Available sizes:


120 X 250

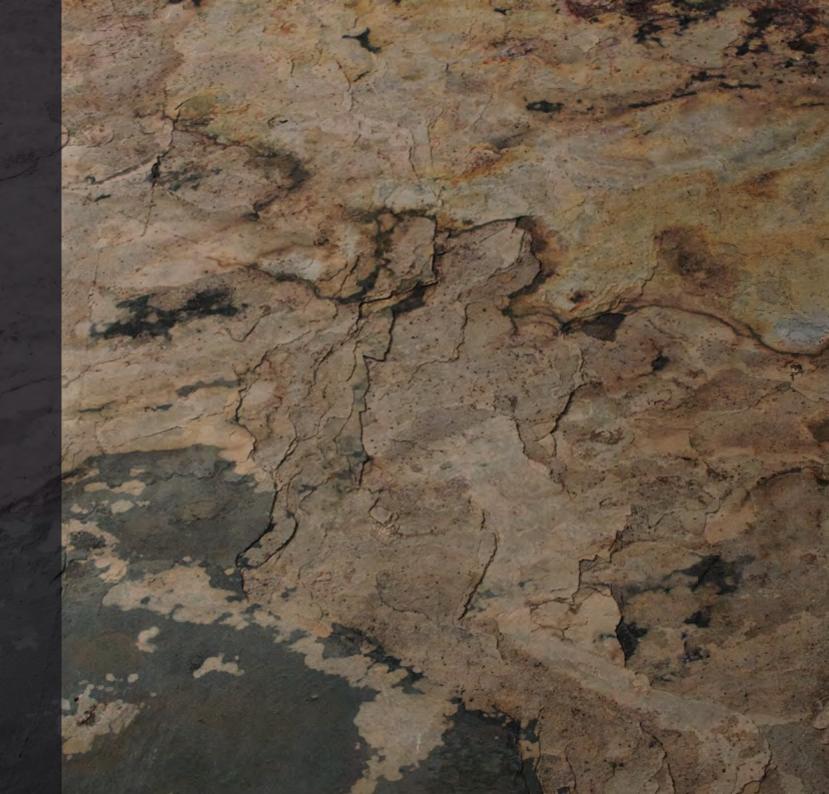

# MULTI PINK

Available sizes:


120 X 250

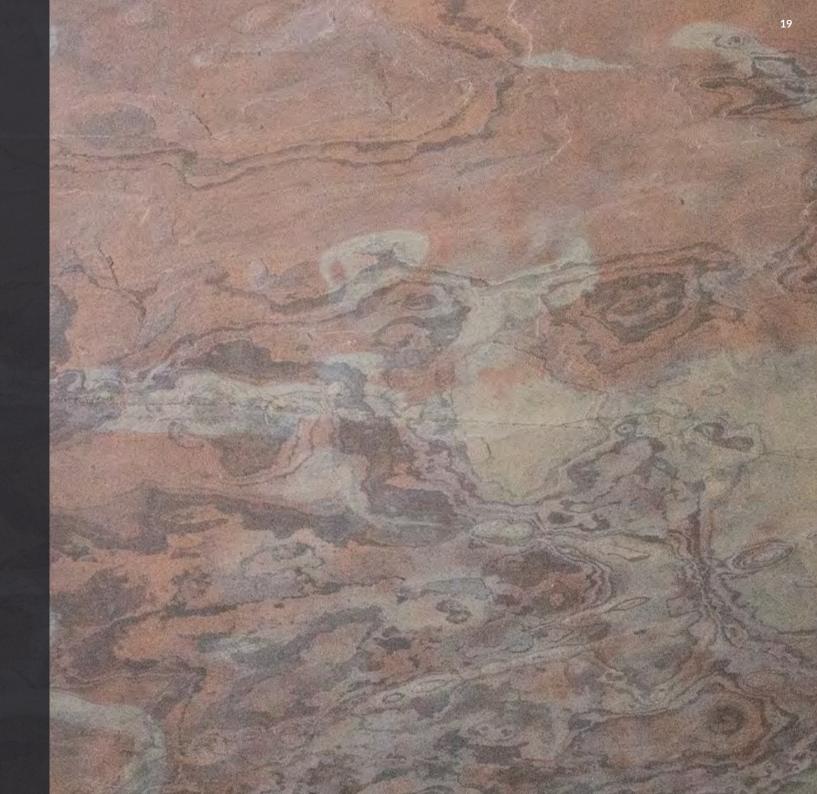

# LIME WHITE

Available sizes:

120 X 250

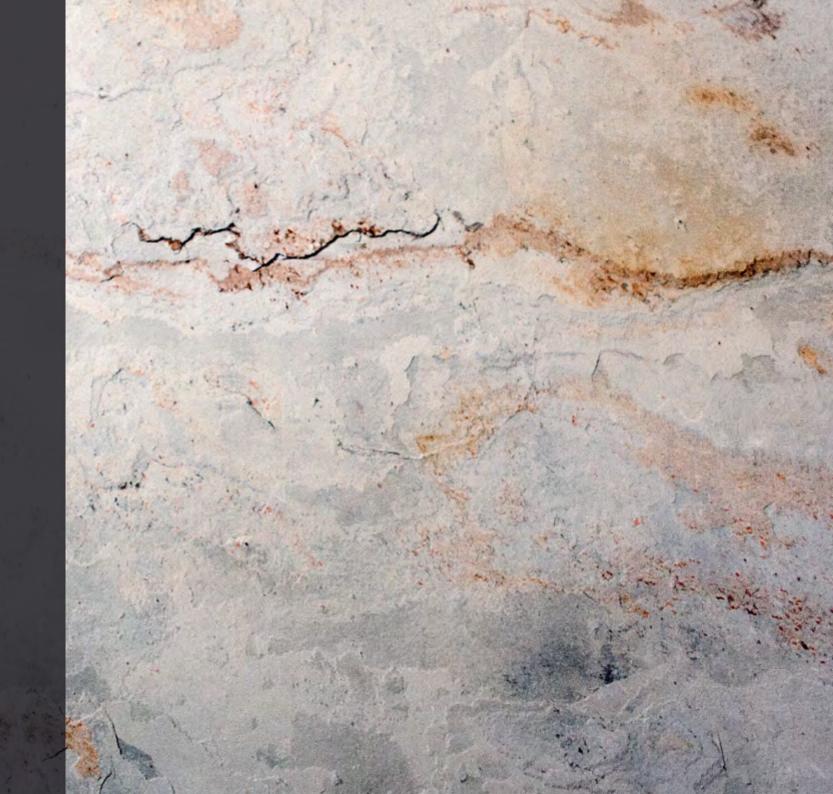

Available sizes:


120 X 250



# **WOOD ROOT**

Available sizes:

120 X 250

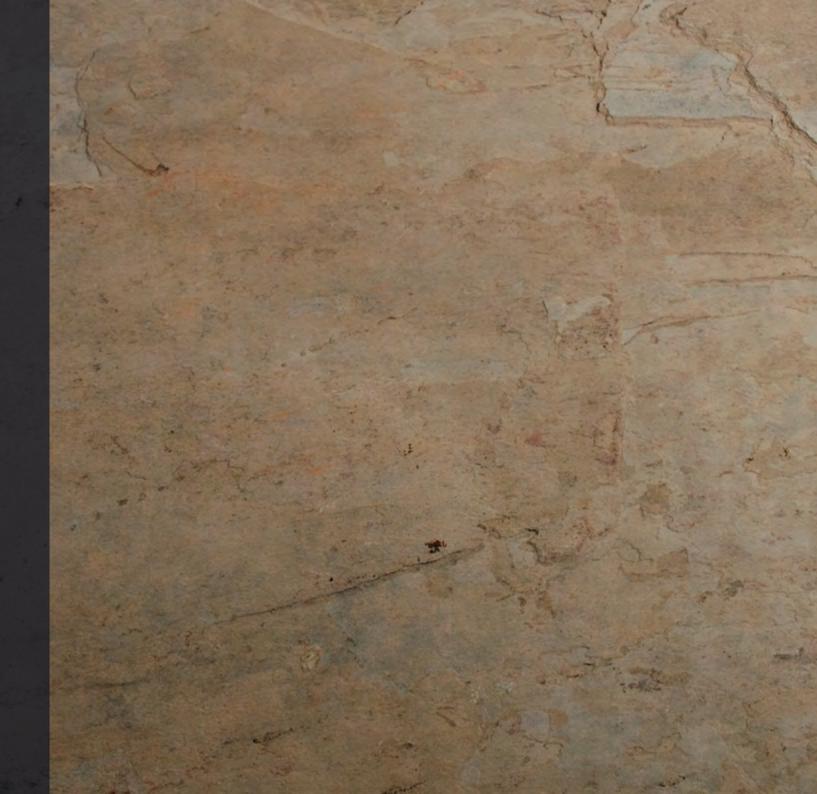





# **ROOSTER MULTI**

Available sizes:

120 X 250

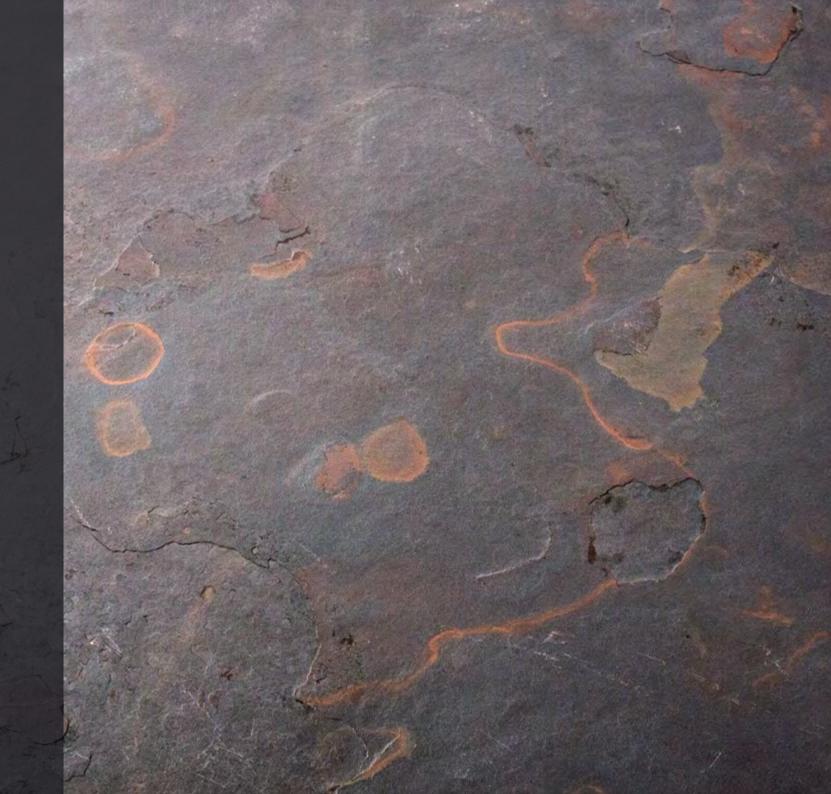


# PURPLE GREY Available sizes: 120 X 250 120 X 60

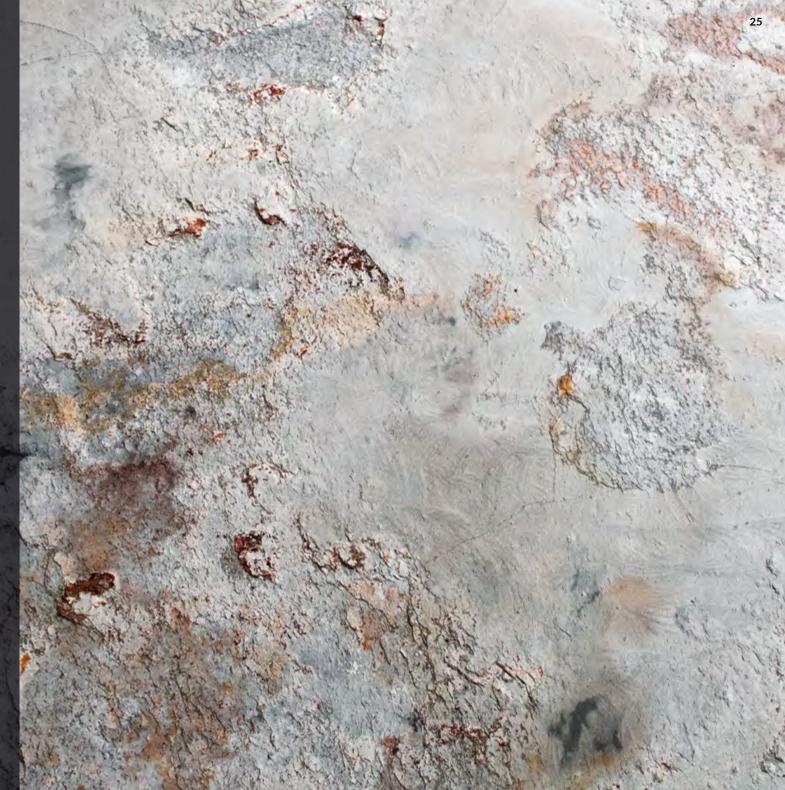

# STEEL BLACK

Available sizes:

120 X 250

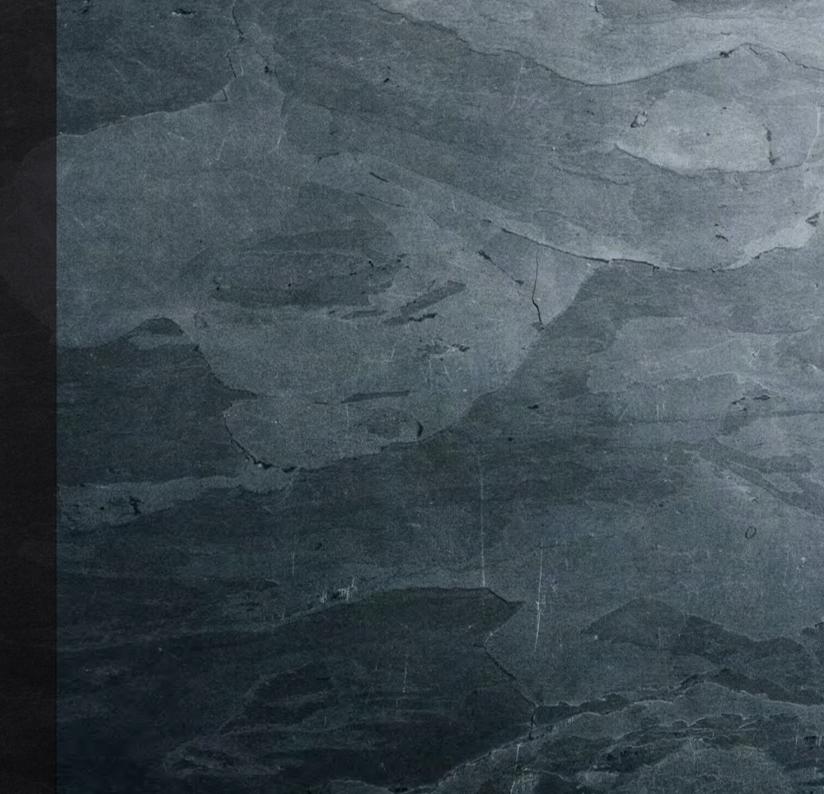

# **OCEAN GREEN**

Available sizes:

120 X 250



# MOTHER EARTH

Available sizes:

120 X 250



# **GOLDEN SHINE**

Available sizes:


120 X 250



# JUNGLE FIRE

Available sizes:

120 X 250

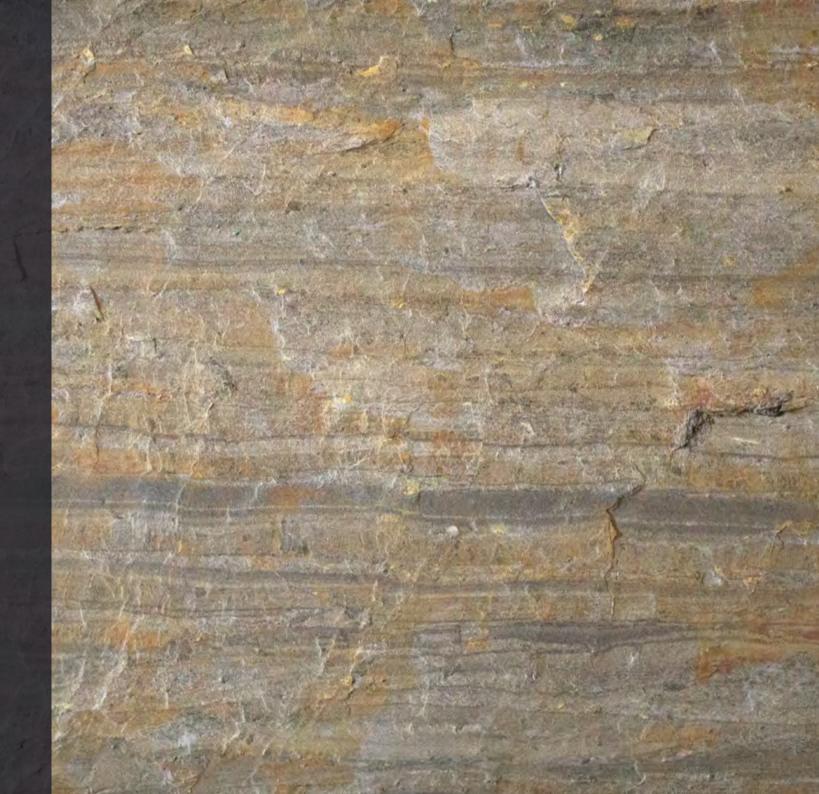











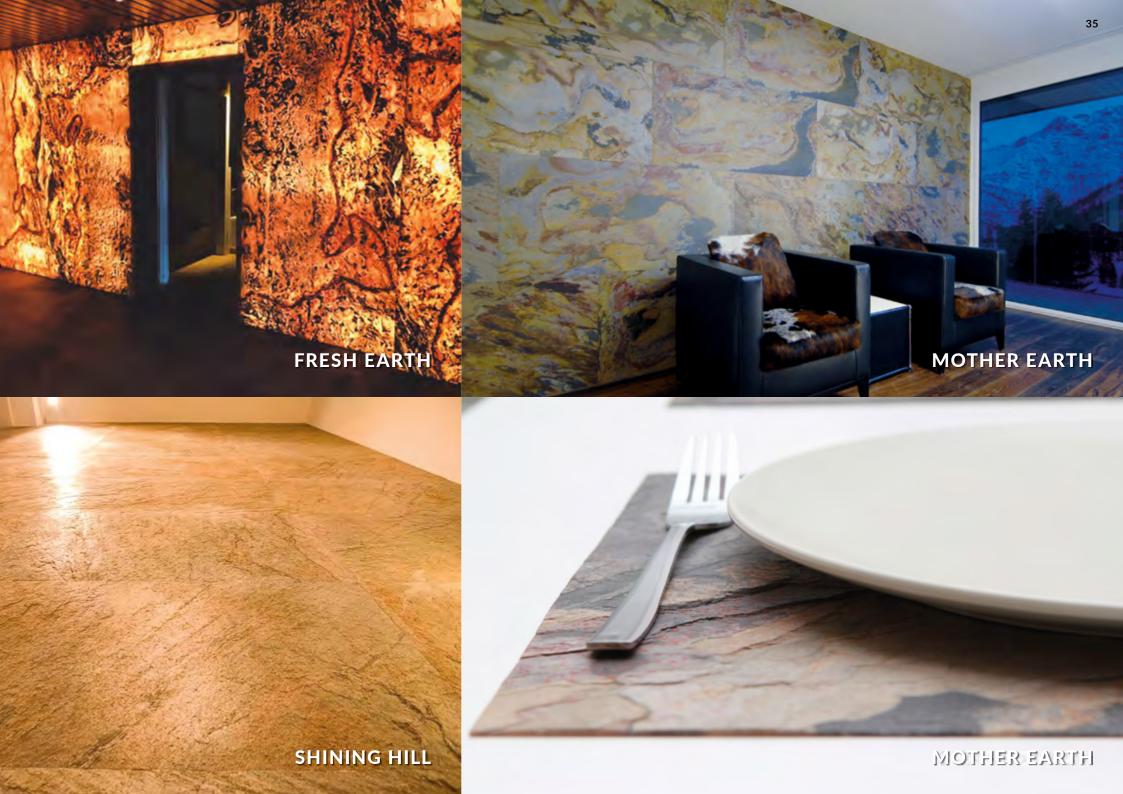







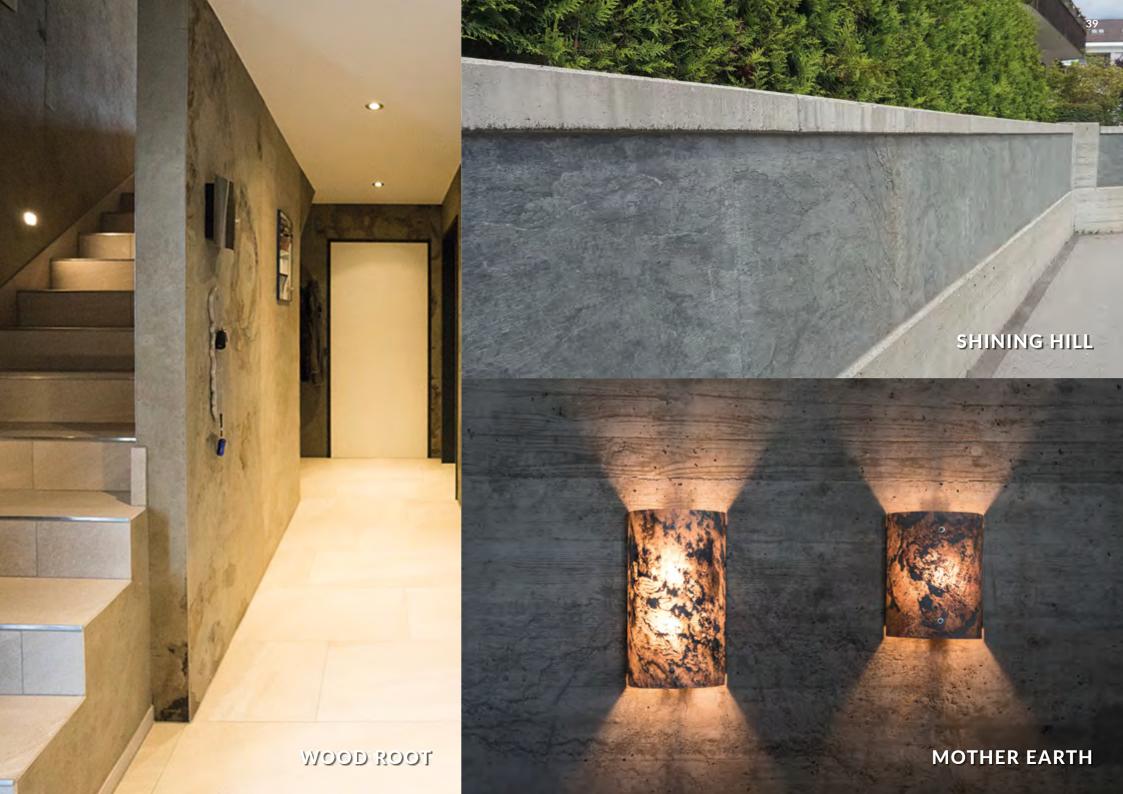





### **TECHNICAL SPECIFICATIONS**

### Weight per m<sup>2</sup>:

Natural stone 1.50 kg Polyester / Resin 0.80 kg Fiberglass 0.50 kg Total weight: approx. 2.80 kg/m<sup>2</sup>

### Material thickness in mm:

Natural stone surface approx. 0.5 to 1.0 mm Fiberglass approx. 1.0 mm Total material thickness: 1.5 to 3.0 mm Formats:  $60 \times 120$  cm and  $120 \times 250$  cm Oversize on request

### Working temperature:

Processing temperature between 10° and 35° C are recommended.

### **Test results:**

- Conformance Certificate
   (TVU Quality Service, Gujarat/July 2014)
   CE-No. TVU/CPR/2014/101
- Fire prevention test as provided for in DIN 4102 part 1 (DMT GmbH & Co. KG, Dortmund/January 2014)
   Requirements for B2 construction material category are met
- High resistance to frost/salts formed as a result of thawing in accordance with standard SIA 262/1:2013 (Technotest AG, Rüschlikon/May 2014)
- Measured quantity of peeling material equals to 20 or 30g in both Skinrock tiles and is negligible.
- No notable changes in the surface were found on both tested specimens after their freezing and thawing with formation of salts
- Water steam diffusion according to SN EN 1931 (Technotest AG, Rüschlikon/May2014)



